



Beco Works, Cricket Lane, Off Kent House Lane, Beckenham, Kent, BR3 1LA
Tel: 020 8778 4271 Fax: 020 8659 3576
E-mail sales@pts-jung.co.uk WWW: www.pts-jung.co.uk

CHARCOAL FILTERS Code (P750)

For use with Sumo and Trashmaster Waste Water Pumping Systems


Please note that if very hot water (continuously above 60°C) is being discharged into the pump systems then we would recommend a 2" diameter pipe to atmosphere or a Microvent filter attached via 2" pipe as minimum. Please contact our Sales Department for details of the Microvent filter or if you require further details on installation of vents.

Charcoal Filter 32mm (Minivent)

Use this filter when venting to atmosphere is not possible. If possible vent into a ceiling void. Using this filter will reduce the chance of smells escaping from the collection tank. Depending on exact use the filter requires changing every six to eighteen months. The vent discharge should be as high as possible, **and** preferably above the height of the pump discharge pipework to prevent possible flooding through the vent pipe.

The filter should ideally be fitted via pipework and vented into ceiling void as diagram below. Pipework should be fitted to the tank using a tank connector positioned through side of the tank, as high up as possible. Fitting through the lid of the tank is not recommended as it prevents lid removal.

Please note that if the filter is connected directly to the tank (with no extension pipework), and the tank experiences a high level water condition, it is probable that the system will flood through the vent. If the filter becomes wet then its ability to filter smells will be greatly reduced and the filter should be replaced soon as possible.

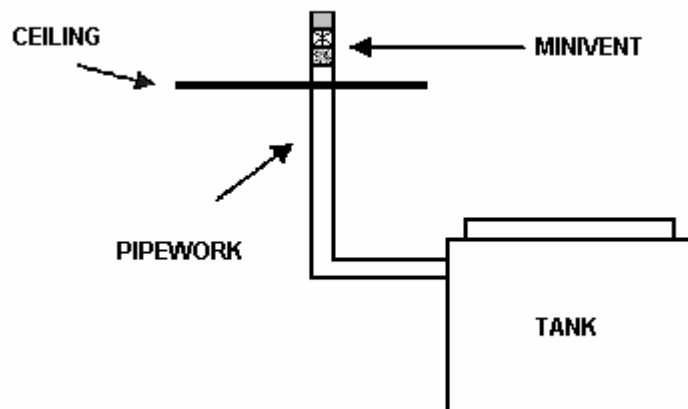

IF YOU WISH TO PLACE AN ORDER, REQUIRE REPLACEMENT FILTERS OR HAVE ANY ADDITIONAL QUESTIONS, PLEASE CONTACT OUR SALES DEPARTMENT