

# COMPLI 400

## SEWAGE LIFTING STATIONS

- Ready-to-connect
- Submersible
- Vertical/horizontal additional inlets
- Revolver clamping flange
- PE-tank approx. 64 L
- Vortex impeller
- Smart Home capable



### DESCRIPTION

This sewage lifting station for detached houses is fitted for versatile fields of application. During the design work, special attention was given to easy handling (recessed grips), space-saving erection and uncomplicated installation.

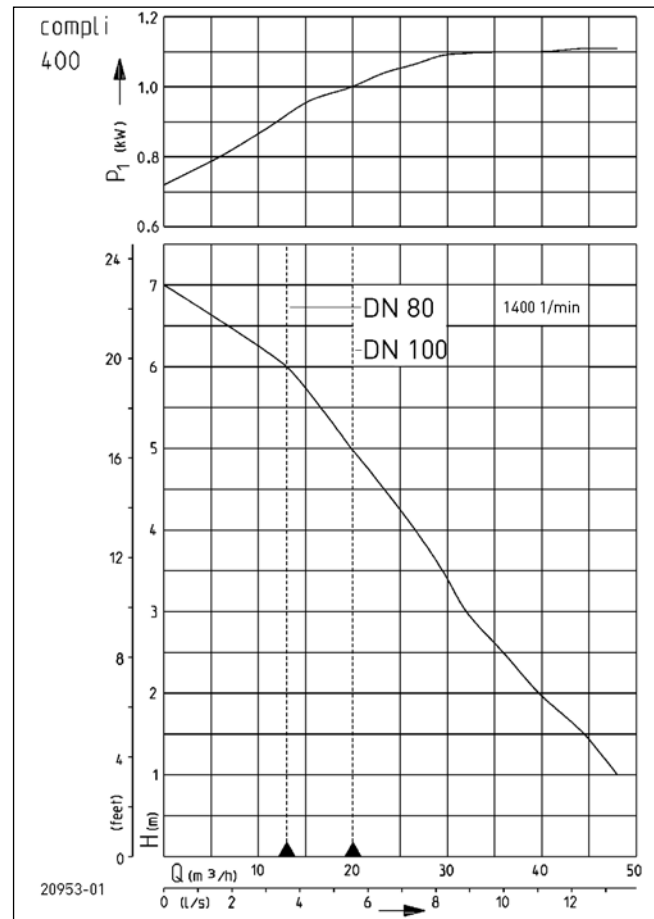
The submersible unit is permitted for general use in areas subject to flooding. The control unit has to be fitted in a well ventilated flood-proof room.

The PE tank has freely accessible drains, a top-mounted cleaning opening and a height-adjustable clamp-type inlet flange which can be adjusted on site to an inlet height of between 180 and 250 mm depending on the drainage situation.

Other horizontally and vertically arranged additional inlets increase the connection and drainage options. The vortex impeller of the pump offers the safety you can rely on.

The compli sewage lifting station can be integrated into a smart infrastructure. The FTJP radio transmitter is connected to the potential-free contact of the lifting station. It is now possible to transmit the switching status (e.g. an alarm message) to an EnOcean-capable smart home gateway (Wibutler, Afriso, Homee).

### PERFORMANCE



Type	Delivery head H [m]	1	2	3	4	5	6
compl i 400	Flow rate Q [m³/h]	48	40	33	27	20	13

We reserve the right to change specifications without notice. Pump performance is subject to ISO 9906 tolerances

The minimum flow velocity in the pressure piping must be 0.7 m/s according to EN 12056. This data is represented in the performance curve as a limit of application.



# COMPLI 400

## SEWAGE LIFTING STATIONS

### SCOPE OF SUPPLY

Ready-to-connect tank system in keeping with German / European standard 12050 with height-adjustable DN 100 clamp-type flange for inlet heights 180 / 250 mm, horizontal and vertical additional inlets diam. 50 mm, DN 100 inlet option from the top, mounted submersible pump and DN 80 connection flange with pipe unit diam. 110, optionally with pre-mounted DN 80 non-return valve, one elastic connection each with clamps for plastic pressure pipes and a sleeved pipe for DN 70 ventilation pipe, automatic level control, control unit (IP 44 type of

protection) with motor protection, contactors, transformer, mains-independent, optionally acknowledgeable alarm system and potential-free make contact for collective failure messages, optical display of sense of rotation (three-phase current), alarm and operation, test run button.

Cable between tank and control 4 m. Cable between control and plug 1,5 m.

### MECHANICAL DATA

Pump	Vertical single-stage	Impeller	Vortex impeller, GFK
Free passage	70 mm	Motor housing	Grey cast iron
Pressure pipe	DN 100	Pump housing	Grey cast iron
Bearing	Ball bearings, grease-lubricated	Submersible	Yes
Shaft	Stainless steel	Pressure outlet	DN 80
		Tank capacity	64 l

### ELECTRICAL DATA

Power line	4m H07RN-F	Insulation class	F
Type of enclosure	IP 68	Winding thermostat	Yes

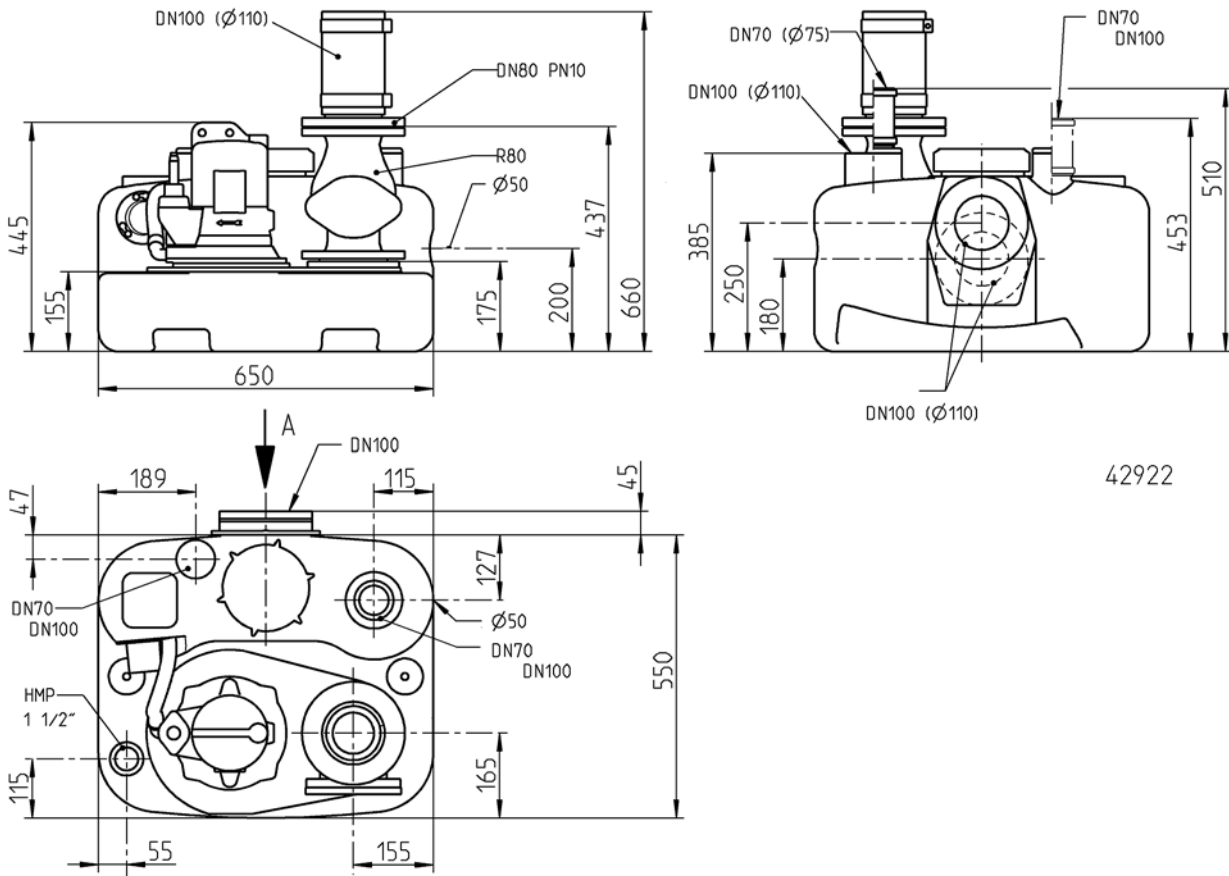
### COMPLI 400

Type	Code No.	Voltage	Motor rating		Current	Wires	Plug	Weight
			P1	P2				
compl 400	<b>JP00637</b>	3/N/PE~400 V	1.25 kW	0.87 kW	2.2 A	6G1,5	CEE	55 kg
compl 400 E	<b>JP09770</b>	1/N/PE~230 V	1.55 kW	1.10 kW	7.1 A	4G1,5	Safety	56 kg
compl 400 with non-return valve mounted	<b>JP09322</b>	3/N/PE~400 V	1.25 kW	0.87 kW	2.2 A	6G1,5	CEE	70 kg
compl 400 E with non-return valve mounted	<b>JP09324</b>	1/N/PE~230 V	1.55 kW	1.10 kW	7.1 A	4G1,5	Safety	71 kg


# COMPLI 400

## SEWAGE LIFTING STATIONS


### Dimensions with swing-type check valve



### Example of installation

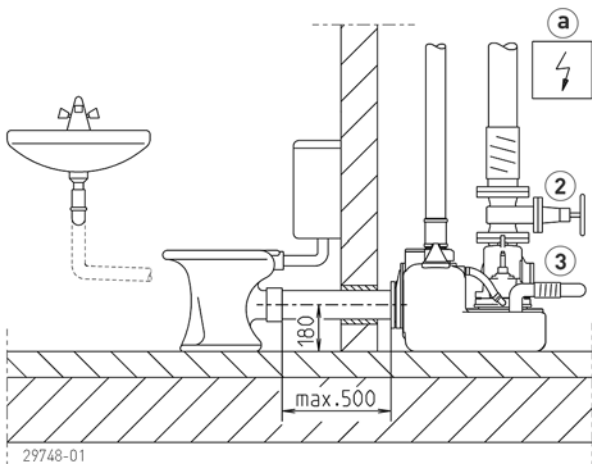

### Example of installation

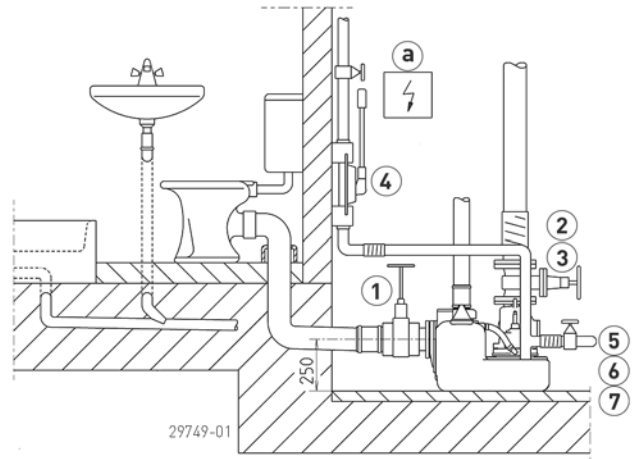








All types have DN 80 / PN 10 connecting flange, however with pipe socket DN 100. For this reason, a non-return valve for the pressure pipe need to be chosen for DN 80 only in case of direct erection. The ownstream pressure pipe is connected to DN 100 by an elastic connection. Sewage lifting stations are to be used for the transport of faecal matter and domestic wastewater in building drainage systems as described in German standard DIN 1986 T3. In keeping with the stipulations of German / European standard EN 12056-4 they

have to be mounted with collecting tanks inside building permitting a free space of 60 cm for operation and repair. The pressure pipe has to be passed above the locally defined backpressure level and a non-return valve tested in keeping with German / European standard 12050-4 has to be mounted. In keeping with German / European standard 12056 the ventilation pipe has to be passed up to the roof. EN 12056 paragraph 5.1 In applications where the waste-water inlet must not be interrupted a double system has to be installed.


# COMPLI 400

## SEWAGE LIFTING STATIONS

### MECHANICAL ACCESSORY

				Code No.
	<b>① Inlet gate valve PVC</b>	with two pipe sockets, DN 100, PN1	360x295 (HxW)	<b>JP28297</b>
	<b>② Sluice valve</b>	DN 80, PN 10, EN 1171	315x180 (HxB)	<b>JP00639</b>
	<b>③ Swing-type check valve</b>	R 80 EN 12050-4	DN 80, PN 4, flange PN 10, EN 558, 260 (H)	<b>JP00706</b>
		R 80 G EN 12050-4	DN 80, PN 4, flange PN 10, EN 558, with counter weight, 260 (H)	<b>JP00707</b>
	<b>Ball-type check valve</b>	K 80 EN 12050-4	DN 80, PN 4, flange PN 10, EN 558, 260 (H)	<b>JP49205</b>
	<b>④ Hand diaphragm pump</b>	for emergency purposes (up to H geod 15 m)	640x1½" (HxD)	<b>JP00255</b>
	<b>⑤ Stop valve</b>	brass, 1½" (DN 40), PN 16	125x60 (HxB)	<b>JP44786</b>
	<b>⑥ Elastic connection</b>	1½" (DN 40), PN 4	120x50 (HxD)	<b>JP44777</b>
	<b>⑦ Hose band clamp</b>	1½"		<b>JP44763</b>

### ELECTRICAL ACCESSORY

				Code No.
	<b>ⓑ Rechargeable battery</b>	for mains independent alarm		<b>JP44850</b>