



### We are Jung

Jung Pumpen has been a reliable business partner in wastewater and sewage disposal since 1924, and since 2007 it has been part of the Pentair Group, a water supply and disposal enterprise.

The company produces high quality pumps, pumping stations and control systems for domestic and property drainage as well as for large-scale industrial and municipal projects.

With Compli lifting stations from **Pentair Jung Pumpen**, you are always on the safe side. For decades, these sewage lifting stations have been the first choice when it comes to disposing of wastewater from commercial premises, houses, apartment buildings and houseboats.

Our lifting stations are as diverse as the requirements that arise. And yet they all have a great deal in common: They are easy to handle and maintain and offer excellent flexibility with regard to connections.

#### Quality products, "Made in Germany"

The sewage lifting stations are manufactured entirely in Steinhagen. Thanks to a high degree of vertical integration, we are able to guarantee the high quality standard of our products.





# Contents

Overview	4
Single units	
Compli 300	6
Compli 400	8
Compli 500	10
Duplex units	
Compli 1000/Compli HL	12
Compli 1200 HL	14
Compli 1500/2500 HL	16
Single and duplex units with cutting system	
Compli Multicut	18
Special units	
Compli in stainless steel	20
Technical data	
Dimensions	21
Standard-compliant installation	22
Configuration assistance	24
Maintenance	25

### Compli - the right lifting system for every application

### Single units



#### Compli 300 E

Tank volume: 50 l Hmax 10.5 (m) | Qmax 29 (m<sup>3</sup>/h) Inlet heights: 180 mm

Discharge branch: DN 80 Dimensions: 445 x 525 x 525 mm

(HxWxD)



#### Compli 400

Tank volume: 64 l

Hmax 7.0 (m) | Qmax 48 (m<sup>3</sup>/h) Inlet heights: 180 to 250 mm Discharge branch: DN 80/DN 100 Dimensions: 528 x 728 x 575 mm

(HxWxD)



#### Compli 500

Tank volume: 117 l

 $Hmax 20 (m) \mid Qmax 76 (m<sup>3</sup>/h)$ 

Inlet heights: variable

Discharge branch: DN 80/DN 100 Dimensions: 600 x 835 x 690 mm

(HxWxD)

### Duplex units



#### Compli 1000/Compli 1000 HL

Tank volume: 117 l

 $Hmax 20 (m) \mid Qmax 76 (m<sup>3</sup>/h)$ 

Inlet heights: variable

Discharge branch: DN 80/DN 100 Dimensions: 600 x 835 x 690 mm

(HxWxD)



#### Compli 1200 HL

Tank volume: 350 l

Hmax 18 (m) | Qmax 73 (m³/h) Inlet heights: variable 560-700 mm

illet heights. Variable 500-700 mill

or rotatable 180 °

Discharge branch: DN 80/DN 100 Dimensions: 810 x 910 x 1010 mm

(HxWxD)



#### Compli 1500/Compli 2500 HL

Tank volume: 500 I/1000 I Hmax 50 (m) | Qmax 100 (m³/h) Inlet heights: 185/700 mm Discharge branch: DN 100

Dimensions:

 $820 \times 910 \times 1610 \text{ mm (HxWxD)}$  $820 \times 1955 \times 1610 \text{ mm (HxWxD)}$ 

### With cutting system



Compli with cutting system 100

Tank volume: 38 l

Hmax 21(m) | Qmax 17 (m³/h) Inlet heights: 180/250 mm Discharge branch: DN 32 Dimensions: 400 x 450 x 619 mm

(HxWxD)



Compli with cutting system 1000

Tank volume: 117 l Hmax 21(m) | Qmax 17(m³/h) Inlet heights: variable

Discharge branch: DN 40 Dimensions: 600 x 835 x 690 mm

(HxWxD)

### Stainless-steel units



Compli Stainless Steel

Tank volume: 270/540/900 I Hmax 16 (m) | Qmax 122 (m³/h)

Inlet heights: 800 mm Discharge branch: DN 100 Dimensions: on request

### Accessories for easy and safe installation



Sluice valve

required for maintenance of the swing-type check valve according to EN standard - size DN 80 or DN 100



Inlet gate valve

Made of PVC, size DN 100 or DN 150, with glued-in pipe sockets for quick and space-saving direct connection to the clamp-type inlet flange.



Hand diaphragm pump

Hand pump for emergency purposes, for a delivery head of up to Hgeod 15 m

## Compli 300 the smallest and lightest

The **Compli 300 E** is the smallest sewage lifting station in the compli series. Its very compact tank dimensions and the numerous connection options make it particularly versatile. It is specially designed for disposing of sewage from small residential units.


The powerful alternating current motor based on a sturdy annular housing made of grey cast iron, which ensures excellent stability and smooth running.

#### Areas of application:

Basement flats Granny annexes Apartments Small workshops

Inlet: 180 mm



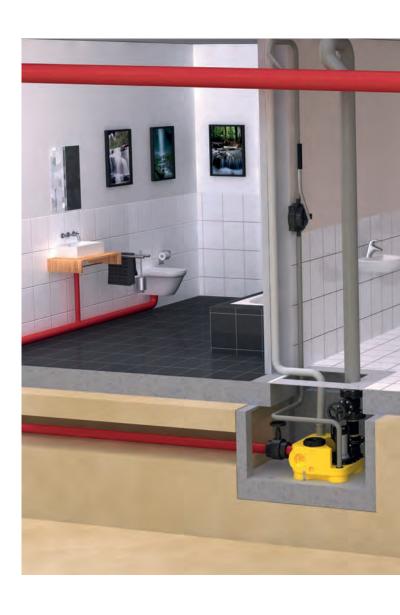



#### ) HIGH OPERATIONAL RELIABILITY

- thanks to cast-iron support platform
- smooth running and low noise

- numerous connection options - easy handling due to small tank dimensions and low weight

- no electrician required - simple assembly

- ) Smart Home compatible

Туре	Mat. no.	Free passage	Hmax[m]	Qmax[m³/h]
Compli 300 E	JP50076	50 mm	7.0	52

## Compli 400 the classic solution for single-family homes

The **Compli 400** has been an integral part of wastewater disposal in single-family homes for decades. The submersible system reliably disposes of domestic wastewater even in areas that are prone to flooding.

Adapted to market requirements, the compli 400 now has a new design, improved technology, and even more convenient features.

The powerful wastewater pump rests on a stable cast iron ring, which ensures stability, smooth running, and a permanently sealed connection to the tank.

Thanks to a height-adjustable inlet socket, the inlet height can be adjusted to the height of the inlet pipe on site, as required.

The control unit included in the scope of delivery has also been improved and now features:

- an alarm that can be acknowledged with the push of a hutton
- a maintenance interval indicator

- a plug-in connection for an additional high-water alarm.

Areas of application:
Single-family houses

<u>Inlet:</u> 180 to 250 mm







- variable discharge branch (DN 80 or DN 100)
- versatile connection options
- turnable swing-type check valve

#### ) INTEGRATED HYDRAULICS

- better flow behaviour
- lower weight
- no corrosion
- less blocking
- larger pump volume

- additional connection for an additional high-water alarm
- alarm acknowledgement
- ) Smart Home compatible

Туре	Mat. no.	Free passage	Hmax[m]	Qmax[m³/h]
Compli 400	JP50079	70 mm	7.0	48
Compli 400 E	JP50081	70 mm	7.0	48
Compli 400	JP50080	70 mm	7.0	48
with swing-type check valve				
Compli 400 E	JP50082	70 mm	7.0	48
with swing-type check valve				

## Compli 500 when a little more is needed

The Compli 500 reliably disposes of larger volumes of wastewater and has a larger storage volume (117 I). As with all Compli systems, this unit has a user-friendly control unit to ensure reliable operation. Different motor outputs are available to meet different performance requirements.

Like the Compli 400 series, it is equipped with an improved control unit and now features:

- an alarm that can be acknowledged with the push of a button
- a maintenance interval indicator
- a plug-in connection for an additional high-water alarm.

#### Areas of application:

Single and two-family houses

#### Inlet:

**DN 100:** Inlet heights 180-205 mm (left), 250-300 mm (centre) and 290-340 mm (right), each steplessly variable

DN 150/DN 50: Inlet heights 180 mm (left), 275 mm (centre) and 315 mm (right)







#### HIGH OPERATIONAL RELIABILITY

drainage situation on site

- with pre-installed swing-type check valve

- variable inlet heights for quickly adapting to the

- single unit with a large-volume tank for more storage volume in an emergency
- higher pumping capacity can be selected to suit the specific application
- cast, longitudinally-sealed cable inlets to protect the pump against moisture penetration
- guided float switch for reliable, clearly-defined switching points

#### **EASY TO MAINTAIN**

- tank bottom optimised for inlets, with less cleaning required
- large cleaning aperture
- bolted impeller connection for quick maintenance

#### **) CONTROL SYSTEM UPDATE**

- maintenance interval indicator
- additional connection for an additional high-water alarm
- alarm acknowledgement
- ) Smart Home compatible

Туре	Mat. no.	Free passage	Hmax[m]	Qmax[m³/h]
Compli 510/4 BW	JP50091	70 mm	7.0	52
Compli 515/4 BW	JP50092	70 mm	9.5	69
Compli 525/4 BW	JP50093	70 mm	5.0-11.0	56
Compli 525/2 BW	JP50094	70 mm	14.0	69
Compli 535/2 BW	JP50095	70 mm	20.5	85

### Compli 1000 HL for extra safeguards

#### NOW WITH HIGHLOGO MICROPROCESSOR **CONTROL UNIT**

Multiple residential units or commercial buildings call for extra safeguards as well as more pumping capacity. This is why the Compli 1000 and Compli 1000 HL are duplex units, with two pumps on one tank. Either the wastewater is pumped by each pump alternately or, at peak loads, both pumps work together.

The new swing-type check valve made of high-tech compound plastic has a larger maintenance opening and offers special benefits. It dispenses with the need to dismantle the pump when carrying out maintenance or replacing the rubber flap.

The 10/4 BW, 15/4 BW and 25/4 BW submersible pumps have screwed, high-strength plastic impellers that can be easily dismantled for maintenance purposes.

The versions with a **HighLogo microprocessor control** unit offer special, convenient features, since for duplex units, in particular, even more attention is paid to safeguards. The many different functions can be selected via the intuitively operated rotary button and are shown on the large display.

With an optional accessory (GSM modem), faults can be sent by SMS and/or email to programmable receivers.

#### Areas of application:

Hotels

Cafés and restaurants Cinemas and theatres Apartment buildings

#### Inlet:

DN 100: Inlet heights 180-205 mm (left), 250-300 mm (centre) and 290-340 mm (right), each steplessly

DN 150/DN 50: Inlet heights 180 mm (left), 275 mm (centre) and 315 mm (right)







- duplex unit with a large-volume tank for more storage volume in an emergency
- higher pumping capacity can be selected to suit the specific application
- pump switching cycles
- analogue level indicator
- ) Smart Home compatible

Туре	Mat. no.	Free passage	Hmax[m]	Qmax[m³/h]
Compli 1010/4 BW E	JP50099	70 mm	7.0	52
Compli 1010/4 BW	JP50100	70 mm	7.0	52
Compli 1015/4 BW	JP50101	70 mm	9.5	69
Compli 1025/4 BW	JP50102	70 mm	11.0	56
Compli 1025/2 BW	JP50103	70 mm	14.0	69
Compli 1035/2 BW	JP50104	70 mm	20.5	85
Compli 1010/4 BW E HL	JP50105	70 mm	7.0	52
Compli 1010/4 BW HL	JP50106	70 mm	7.0	52
Compli 1015/4 BW HL	JP50107	70 mm	9.5	69
Compli 1025/4 BW HL	JP50108	70 mm	11.0	56
Compli 1025/2 BW HL	JP50109	70 mm	14.0	69
Compli 1035/2 BW HL	JP50110	70 mm	20.5	85

### Compli 1200 for more storage volume

#### NOW WITH NEW HIGHLOGO MICROPROCES-SOR CONTROL UNIT

The Compli 1200 with a storage volume of 350 l is the ideal solution when wastewater from several residential units or from commercial establishments needs to be disposed of. It is designed to ensure convenient handling, a space-saving set-up and easy installation and maintenance.

The new swing-type check valve made of high-tech compound plastic has a larger maintenance opening and offers special benefits. It dispenses with the need to dismantle the pump when carrying out maintenance or replacing the rubber flap.

The 10/4 BW, 15/4 BW and 25/4 BW submersible pumps have screwed, high-strength plastic impellers that can be easily dismantled for maintenance purposes.

The HighLogo microprocessor control unit is particularly convenient. For duplex units, in particular, even more attention is paid to safeguards. The many different functions can be selected via the intuitively operated rotary button and are shown on the large display.

With an optional accessory (GSM modem), faults can be sent by SMS and/or email to programmable receivers.

#### Areas of application:

Commercial properties Hospitals Apartment buildings Hotels Restaurants

#### Inlet:

The rear inlet (DN 150) can be mounted with a fitting (not included) so that it is height-adjustable (inlet heights 560-700 mm) and rotatable (180°).







#### ) HIGH OPERATIONAL RELIABILITY

- duplex unit with a large-volume tank for more storage volume in an emergency
- higher pumping capacity can be selected to suit the specific application
- maintenance interval indicator
- pump switching cycles
- analogue level indicator
- ) Smart Home compatible

Туре	Mat. no.	Free passage	Hmax[m]	Qmax[m³/h]
Compli 1210/4 BW HL	JP50118	70 mm	7.0	52
Compli 1215/4 BW HL	JP50119	70 mm	9.5	69
Compli 1225/4 BW HL	JP50120	70 mm	11.0	56
Compli 1225/2 BW HL	JP50121	70 mm	14.0	69
Compli 1235/2 BW HL	JP50122	70 mm	20.5	85

## Compli 1500/ Compli 2500 for complex applications

### NOW WITH NEW HIGHLOGO MICROPROCESSOR CONTROL UNIT

For large volumes of industrial or municipal wastewater, a particularly large tank is required. With a total volume of 1000 I and correspondingly powerful non-clogging pumps, the Compli 2500 is the largest lifting station. Depending on the requirements, the units are supplied with one tank (Compli 1500 with 500 I, see illustration) or two tanks (Compli 2500).

The **HighLogo microprocessor control unit** is particularly convenient. For duplex units, in particular, even more attention is paid to safeguards. The many different functions can be selected via the intuitively operated rotary button and are shown on the large display.

With an optional accessory (GSM modem), faults can be sent by SMS and/or email to programmable receivers.

Areas of application:

Commercial properties
Hospitals
Sports stadiums/event centres
Hotels
Apartment buildings

#### Inlet:

**DN 150** right, left and rear, inlet height 700 mm





Type - 1 tank	Mat. no.	Type - 2 tanks	Mat. no.	Free passage	Hmax[m]	Qmax[m³/h]
Compli 1525/4 C1 HL	JP50123	Compli 2525/4 C1 HL	JP50133	100 mm	10.0	104
Compli 1535/4 C1 HL	JP50124	Compli 2535/4 C1 HL	JP50134	100 mm	12.0	103
Compli 1555/4 C5 HL	JP50125	Compli 2555/4 C5 HL	JP50135	100 mm	18.0	100
Compli 1575/4 C5 HL	JP50126	Compli 2575/4 C5 HL	JP50136	100 mm	20.0	100
Compli 1575/4 B6 HL	JP50127	Compli 2575/4 B6 HL	JP50137	70 mm	22.5	91
Compli 1535/2 B2 HL	JP50128	Compli 2535/2 B2 HL	JP50138	70 mm	18.0	102
Compli 1555/2 B2 HL	JP50129	Compli 2555/2 B2 HL	JP50139	70 mm	22.0	96
Compli 1575/2 B5 HL	JP50130	Compli 2575/2 B5 HL	JP50140	70 mm	31.0	104
Compli 15100/2 B5 HL	JP50131	Compli 25100/2 B5 HL	JP50141	70 mm	41.0	91
Compli 15200/2 B6 HL	JP50132	Compli 25200/2 B6 HL	JP50142	70 mm	50.0	95

) Smart Home compatible

## Compli with Multicut cutting system

The Compli with MultiCut Grinder Pumps is specially designed for cases where wastewater has to be pumped through long, small-diameter pressure pipes to the next sewer or where the delivery head is extremely large (several floors).

It is available as single and duplex units.

Areas of application for the compli with Multicut cutting system:

Campsites Toilet cars/trailers Smaller buildings Shops

Inlet, compli 1000 with cutting system: **DN 150/DN 50:** Inlet heights 180, 275

and 315 mm

**DN 100:** Inlet heights 180-340 mm









#### ) SIMPLE ASSEMBLY

- ready to plug in and easy to install
- height-adjustable inlets
- clamp-type inlet flange made of plastic
- pre-installed swing-type check valve

#### ) CONTROL SYSTEM UPDATE FOR SINGLE UNITS

- maintenance interval indicator
- additional connection for an additional high-water alarm
- ) Smart Home compatible

Туре	Mat. no.	Free passage	Hmax[m]	Qmax[m³/h]
Compli 108/2 ME	JP50088	7 mm	16.0	16
Compli 108/2 M	JP50089	7 mm	16.0	16
Compli 120/2 M	JP50090	7 mm	8.0-24.0	16
Compli 508/2 ME	JP50096	7 mm	16.0	16
Compli 508/2 M	JP50097	7 mm	16.0	16
Compli 520/2 M	JP50098	7 mm	2 8.0-24.0	16
Compli 1008/2 ME	JP50112	7 mm	16.0	16
Compli 1008/2 M	JP50114	7 mm	16.0	16
Compli 1020/2 M	JP50115	7 mm	28.0-24.0	16

### Compli in stainless steel

For applications where special fire protection regulations apply, we offer individually configured sewage lifting stations with stainless-steel tanks.

The stainless steel tanks have freely accessible connections with a clamp-type inlet flange for easy installation. To ensure time-saving maintenance, a cleaning opening is provided at the top, and the pumps can be easily replaced


Areas of application: Underground train stations Airports Multi-storey car parks





- ) high-quality stainless-steel tank
- ) tank volume on request
- ) selectable inlet positions
- ) Smart Home compatible




## The right size

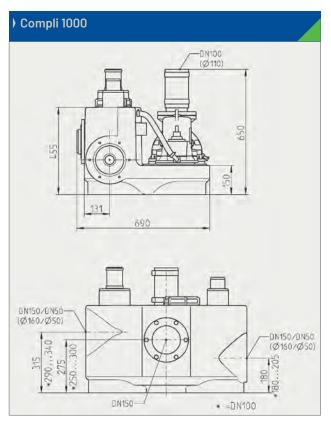

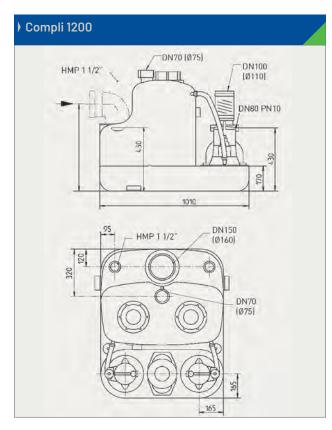

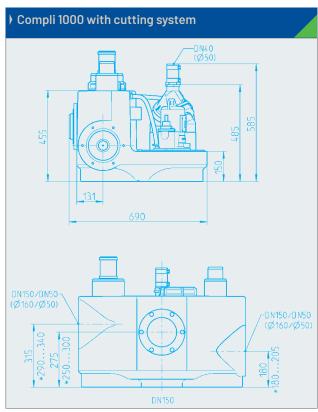

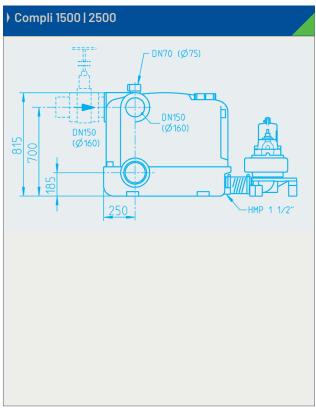

### Standard-compliant installation

#### **Gravity drainage**

Wastewater from sources above the backflow level is drained via gravity. (EN 12056-1, para. 4.2).

#### Pressure pipe

(EN 12056-4, para. 5.2). The pressure pipe must withstand 1.5 times the maximum pump pressure of the system.

#### Fill level

in the pipeline (DIN 1986-100, para. 14.1.5.2). Prevents unwanted pressure fluctuations, so that siphons cannot be sucked empty, for example.

#### Workspace

Lifting stations must be installed leaving 60 cm of free working space (EN 12056-4, para. 5.1). This facilitates maintenance and improves occupational safety.

#### Hand diaphragm pump


Recommended to allow emergency disposal if malfunctions or power failures occur.


#### Inlet gate valve DN 100

(EN 12056-4, para. 5.2). Prevents the inflow of wastewater during maintenance work. The plastic version takes up much less space than the cast-iron version.

#### Installation/ buoyancy control

(EN 12056-4, para. 5.1 / 12050-1, para. 4.6). Securing devices must be used to prevent twisting and floating.

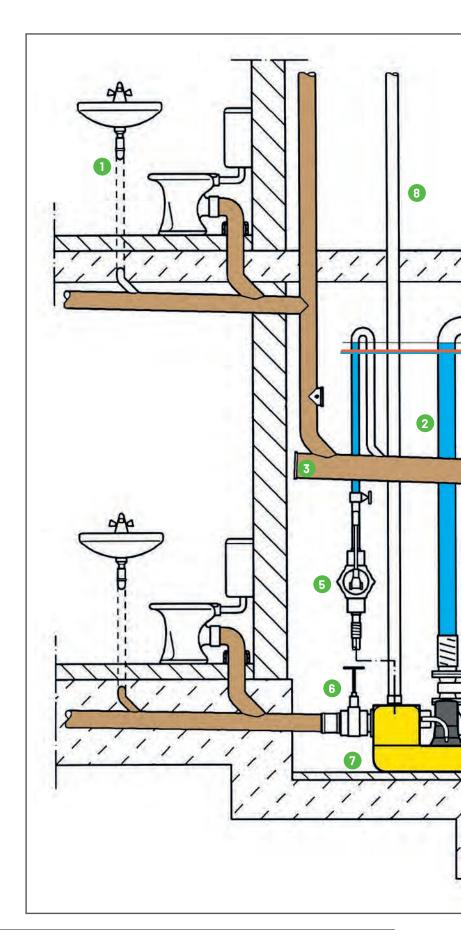

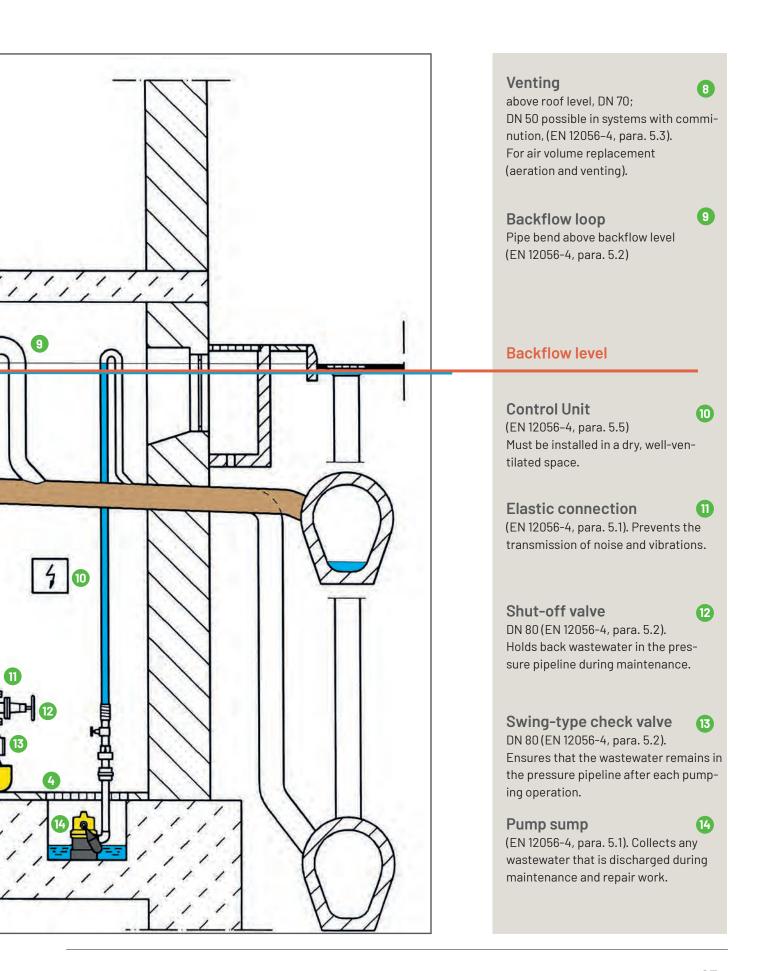

# Configuration assistance for pumps / lifting stations

Con	npany:		Tel./	/fax:	
Add	ress:		Proj	ect, place name:	
Pos	tcode, place name:		_	New construction Renovation	 on
	Please return by fax to +49 5	52 04 / 80 368 or by email	— I to info	@iung-pumpen.de	
1.0	•			Wastewater type/composition	
1.0	Building/unit requiring drainage  Basement/single bathroom/laundry room		2.0	Domestic wastewater	
	Single apartment			Domestic wastewater with faecal content	
	Single-family house			Surface water (drainage)	
	Two-family house/apartment block			Condensate from boilers or air conditioning	
	·				
	Commercial/office building Public house/restaurant/hotel			Wastewater with high percentage of fibres and solids	
				Wastewater with aggressive components, e.g. silage	
	Industrial plant			Wastewater with mineral components, e.g. sand	
	Public building			Activated sludge/wastewater treatment plant discharge	Ш
	Leisure centre/sports facility			Other	
	Discharge into a public sewer		0.1	El	
	Other		2.1	Flow rates	
1.1	Drainage units (DUs)			Total wastewater outflow 0	
	Description	Quantity		(if known) □l/s □m³/h	
	Urinal (single or row, per urinal)		or		
	Single urinal			No. of inhabitants (people)	
	Washbasin, bidet			No. of people (0.005 l/s*d)	
	Shower without plug		or		
	Shower with plug, bathtub			Surface drainage	
	Kitchen sink, dishwasher			Postcode, place name, to determine rainfall intensity	
	Washing machine 6 kg, floor drain DN 50				m²
	Washing machine 12 kg, floor drain DN 70				m <sup>2</sup>
	Floor drain DN 100			<ul> <li>amount of which is semi-permeable, e.g.</li> <li>block paving</li> </ul>	$m^2$
	WC 6 litre, WC 7.5 litre			- amount of which is impermeable, e.g. asphalt,	
	WC 9 litre			concrete	m²
	Other			- amount of which is below the backflow	m <sup>2</sup>
				level,	m-
				(e.g. basement entrances, garage entrances etc.)	
1.2	Installation location of pump/lifting statio	n	2.2	Hydraulic data	
	Inside the building, above ground			Geodesic delivery head H <sub>geo</sub>	m
	Inside the building, below ground			(from switching-off level of the pump to the	
	Outside the building, below ground			pressure pipe transfer point)	
	Inlet depth (ground level to invert)	cm			m
	Loading capacity of chamber cover			Pressure pipeline includes downhill sections	
	- Suitable for pedestrian traffic (cl. A)			Further details about pressure pipeline (if known)	
	- Suitable for car traffic (cl. B)			Nominal diameter DN	
	- Suitable for HGV traffic (cl. D)			Pressure rating PN	
	Existing chamber, $\emptyset$ m			Internal diameter mm	
	Chamber depth m			Material: PVC-U PE-HD Other	
				Connection to existing pressure pipeline? ☐ Yes ☐ No	
Con	tact person			What is the pre-pressure?	
Ema	ail				
Tel.	for queries		Date	e Stamp, signature	


### Proper maintenance

Have your sewage lifting station serviced regularly by qualified personnel. By doing so, you not only comply with the standards of EN 12056 Part 4, but also secure the following benefits:

- prevent cost-intensive repairs
- high operational reliability
- low breakdown rate
- long service life
- highly efficient system





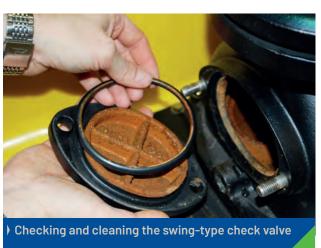





9	C
_	τ