

FLUTBOX

PUMP TECHNICAL SERVICES LIMITED



THE SUBMERSIBLE PUMP SPECIALISTS

DRAINAGE PUMPS MANUFACTURING SALES PROJECT DESIGN INSTALLATION MAINTENANCE AND REPAIRS

- With powerful submersible drainage pump U5KS
- Pump with cooling jacket for motor housing
- Quick and easy hose

- connection with C-coupling
- Float fixation for continuous operation
- Wall mounting for storage




DESCRIPTION

The "Flutbox" is a first aid kit for draining basements in an emergency. Just place the pump with its carrying cage on the floor and pump out the water quickly and reliably via the 12.5 m pressure hose (Ø 52 mm). When the float is locked, the pump will continue to operate until the remaining water is 35 mm deep.

The U5KS can be used as a fixed or mobile system, with or without its carrying cage, in the house and garden. If the foot strainer is removed, the free passage of 20 mm can be fully utilised.

PERFORMANCE

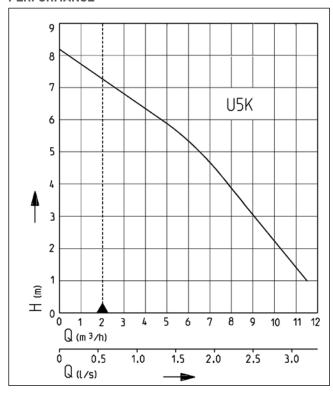

Туре	Delivery head H[m]	1	2	3	4	5	6	7
Flutbox	Flow rate Q[m³/h]	11.5	10.5	9.0	7.5	6.5	4.5	2.5

Specifications can be changed without notice. Performance subject to ISO 9906 tolerances. The minimum flow velocity in the pressure piping must be 0.7 m/s according to EN 12056. This data is represented in the performance curve as a limit of application.







D 141-2306

FLUTBOX DRAINAGE PUMPS

SCOPE OF SUPPLY

1 U5KS cellar drainage pump; 1 pressure hose, 12.5 m long, with C coupling (C52); 1 carrying cage with integrated pump fixing; 1

float fixation.

MECHANICAL DATA

Pump	Vertical single-stage	Shaft	Stainless steel	
Free passage	20 mm	Impeller	Vortex impeller, GFK	
Bearing	Ball bearings, grease-lubricat-	Motor housing	Stainless steel	
	ed	Pump housing	GRP	
Seal on motor side	Rotary shaft seal	Submersible	Yes	
Oil chamber	Yes	Pressure outlet	C-coupling	
Seal on medium side	2-fold rotary shaft seals	Weight	11 kg	
Run dry protection	Yes		-	


ELECTRICAL DATA


Ciruit	With built-in level control	Wires	3G1,0	
Voltage	1/N/PE~230 V	Type of enclosure	IP 68	
Motor rating P1	0.52 kW	Insulation class	В	
Motor rating P2	0.38 kW	Winding thermostat	Yes	
Current	2.3 A	Motor protection	Integrated	
Power line	10m H07RN-F	Plug	Safety	

FLUTBOX

Туре	Code No.	
Flutbox	JP09479	

Dimensions Flutbox mm





09479-00