



**PUMP TECHNICAL
SERVICES LIMITED**




THE SUBMERSIBLE PUMP SPECIALISTS

MANUFACTURING | SALES | PROJECT DESIGN | INSTALLATION | MAINTENANCE AND REPAIRS

Plancofix

**FLOOR DRAINAGE PUMPS
FOR THE SHOWER**

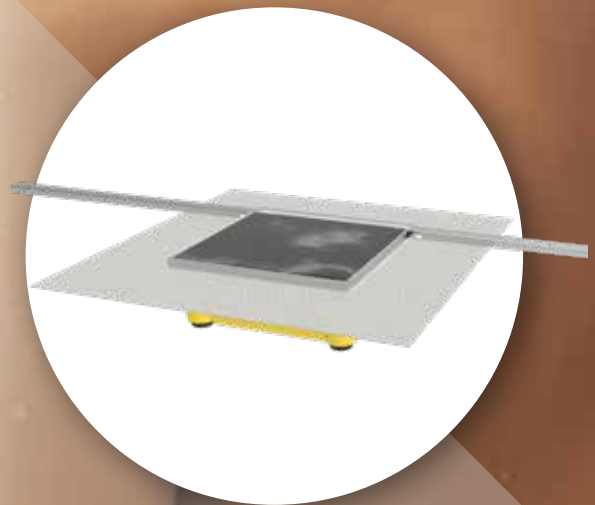

www.pts-jung.co.uk



Low level shower OF THE HIGHEST STANDARD.



Water doesn't flow UPHILL? WELL IT DOES NOW!

Your dream

Does your shower exude not only water but a certain early eighties "charm"? Does it deserve a little revitalisation?

Or has your home situation changed and you would now like to install an additional shower in the loft or basement?

Do you dream of a stylish, modern, barrier-free shower with trouble-free access?

Barrier-free access is not only elegant but also functional

◆ User-friendly

With no step required, there will be no more tripping into the shower. And showers no longer present a problem for older people either.

◆ Easy to clean

Easily accessible corners make daily cleaning particularly easy.

◆ A new spaciousness

The shower area blends seamlessly into the bathroom, letting every available square metre add to the feeling of space. Your bathroom seems larger.

The "problem"

„Your barrier free shower cannot be installed in an old building,” says your installer. „Due to the low level of the floor drain, the waste water cannot reach the next downpipe. After all, water cannot flow uphill.”

Making the impossible possible

True - but not quite. Because Jung Pumpen has developed special floor drainage pumps, the Plancofix, the Plancofix Plus and the Plancofix Line, to tackle precisely this problem.

Die Lösung

Built into your bathroom floor, the floor drainage pump transports the shower water quietly and well concealed into the nearest existing drain. From here it flows down it's own natural way, simple and just as desired. It's as easy as that, and just what you had in mind.





The 3 versions

EACH HAS IT'S OWN PLUS.



In comparison

WHICH MODEL CAN DO WHAT?

Plancofix

It pumps higher and further

Jung Pumpen's Plancofix is the first fully-fledged floor drainage pump for floor-level showers.

Whenever you need to install a floor-level shower in an existing building but the gradient to the existing drain is inadequate, the Plancofix can simply pump the shower water into the nearest drain.

The Plancofix is set into the existing bathroom floor - an opening of approx. 40 x 40 x 12 cm is required. The Plancofix can then be tiled over and works almost invisibly beneath your feet as you relax in the shower.

Mat. No.: JP44685

Plancofix Plus

Less can be more

The Plancofix plus needs even less depth for installation. Why is this "less" a "plus"?

Where the floor construction height is restricted, every centimetre saved may be crucial. The Plancofix plus needs a depth of only 8 cm, saving 1,5 whole cm compared to the Plancofix. If a further installation depth reduction is required, the moulded insulating tray can be removed to save one more centimetre.

As a rule, a discharge head of just a few centimetres is all that is required to pump the wastewater from A to B. This means that the Plancofix plus offers sufficient reserves to transport the shower water safely to the nearest drain.

In addition the Plancofix plus impresses with the extremely low operational noise. The noise emission is below 30 dB (A) and scarcely audible.

Mat. No.: JP47014

Plancofix Line

With shower channel


The Plancofix Line comes into your house with a 1.20 m long shower channel. With a simple cut the channel can be shortened to the individual size of your shower.

The advantage of the gutter is obvious: the tiler only has to create a slope on one side in the direction of the gutter. Complicated tile cuts to lead the water into the punctiform drain are no longer necessary.

The user of the shower no longer stands on the floor drain, as it is usually installed inconspicuously close to the wall.

The factory-fitted sealing fleece meets the water impact class W 3-I and the crack class R 3-I according to DIN 18534. It thus offers the highest protection against leaks and cracks.

Mat. No.: JP50177

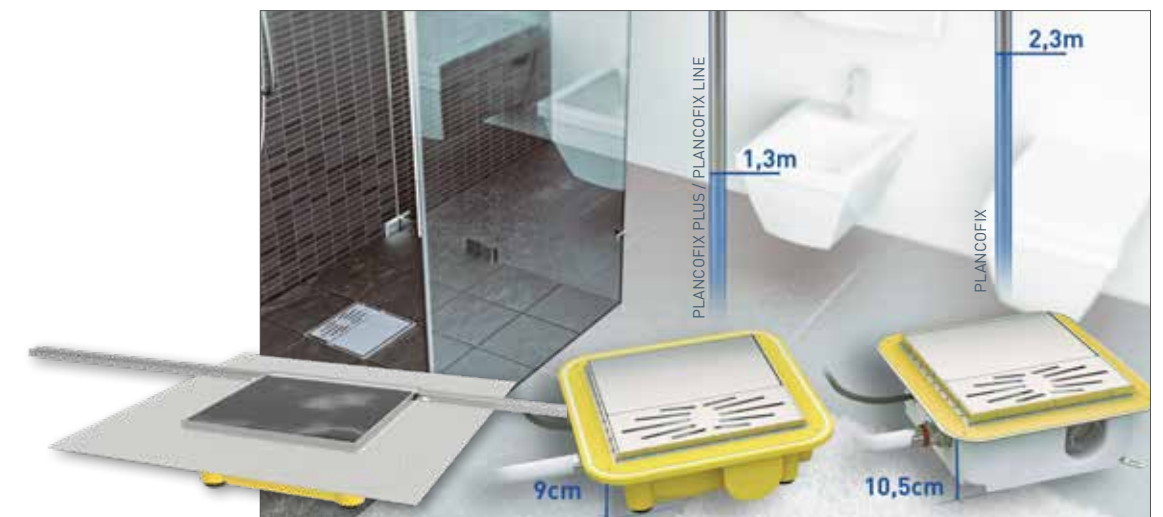

	Plancofix Line	Plancofix Plus	Plancofix
Q max	25 l/min	25 l/min	30 l/min
H max	1.30 m	1.30 m	2.30 m
Installation depth	90 mm* (80 mm)	90 mm* (80 mm)	105 mm
Pressure connection	1" FPT	1" FPT	1" FPT
Motor rating	30 W	30 W	65 W

*Installation depth: With insulation tray 9 cm, without insulation tray 8 cm



In four steps
TO THE NEW WELLNESS OASIS.



Your choice
IS ALWAYS THE BEST CHOICE.

Break out the barriers

◆ Step 1

The old shower is removed, including the tiles.

◆ Step 2

The installation depression is created. There is no need to worry about structural stability, since this small opening can be withstood by any floor.

◆ Step 3

The flat Plancofix unit is placed into the depression, joined to the nearest wastewater pipe and connected to the electricity supply. The highest safety standards are ensured thanks to VDE approval. The floor screed and sealant are installed.

◆ Step 4

Now, only the new tiles need to be laid. The thickness of the tiles is almost immaterial with the Plancofix - since the collar adapts flexibly to the tiles.

◆ The last step

you can take yourself: directly into your new, floor-level shower for a comfortable and enjoyable shower experience!



Plancofix und Plancofix Plus

◆ Inside or next to the shower cabinet

Both products can be installed inside or outside your shower cabinet, according to your personal taste. Inside the cabinet your pump is hardly noticeable - outside you never stand with your feet on the drain.

◆ Completely tiled

You can integrate the Plancofix almost invisibly into the design of your modern bathroom. Your shower water then disappears through a narrow, inconspicuous groove that runs around one of the tiles.

◆ With stainless steel drain cover

The tile with the drainage groove can also be replaced with a stainless-steel drain cover, included in the scope of supply. To suit your taste.


In every case, you can be sure of Jung Pumpen's renowned quality and reliability. Whichever option you decide upon, your choice is always the best.

Plancofix Line

◆ Harmonische Optik

Always install the Plancofix Line inside your shower enclosure. The supplied shower channel requires only 4 cm distance to the wall. The Plancofix is tiled with the floor tiles and therefore integrates perfectly into the harmonious overall picture of your bathroom (see picture above).



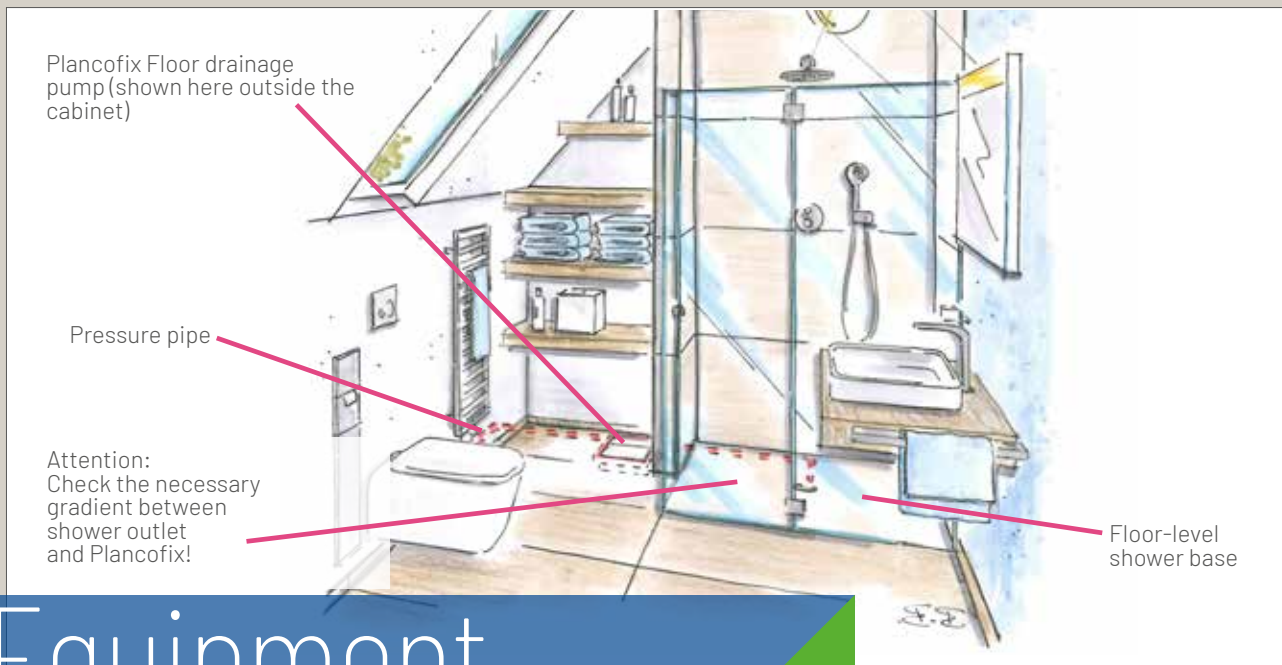

Equipment

AT A GLANCE:

◆ Inflow

from above through the floor drain, or from the side (in combination with a shower channel, for example)

◆ Level controller

using float switch

◆ VDE Approval

◆ Reversible cover

with stainless-steel or tiled finish (scope of supply)/Plancofix Line tileable only

◆ Seal collar

for creating thin-bed seal

◆ Easy to clean

due to good accessibility

◆ Adjustable feet

◆ Stainless steel drain cover:

included with all Plancofixes in the scope of delivery

◆ Shower channel

1.20 m long, can be shortened individually, included in Plancofix Line scope of delivery

◆ Extremely silent

Noise emission with Plancofix Plus and Plancofix Line < 30 dB(A)

◆ Resistant

Suitable for wheel chairs

◆ Dimensions

Plancofix

H x W x D: 12.4 x 34 x 34 cm,
Installation depth 10.5 cm

Plancofix Plus and Plancofix Line

H x B x T: 10.3 x 35.2 x 35.2 cm,
Installation depth 9 cm

visible dimensions of all models

25 x 25 cm



Secondary drainage to be opened if required



Height-adjustable cover/
non-return valve of side inlet



Rubber feet for noise reduction