



Beco Works, Cricket Lane, Off Kent House Lane, Beckenham, Kent, BR3 1LA
Tel: 020 8778 4271 Fax: 020 8659 3576
E-mail sales@pts-jung.co.uk WWW: www.pts-jung.co.uk

PTS GRP KIOSKS P727 SINGLE, P728 DUAL, P729 TRIPLE


- GRP/12mm Ply/GRP composite construction to provide a maximum 'U' value of 3.0 W/m² Deg C (Thermal insulation).
- Dust and weather proof to an IP54 Protection rating.

This panel construction offers a half-hour fire resistance, compliant with BS476 Part 22 (retention of stability, integrity and insulation). Fire retardant resin is used to provide a self-extinguishing laminate to BS476 Part 7 Class 2 (surface spread of flame).

- 1 No 700mm W x 650mm H clear opening double door fitted with door furniture as detailed below.
- 2 No Internal hinges per door
- 2 Corner locks for added door security
- 10mm Ply Backboard
- 1 No Cylinder lock with 2 Keys
- 2 Brass slide bolts (dual door version)

Optional extra

- 1 No Combination PTS (P723) Flashtone Multi-Tone Sounder (12/24V IP66) fixed only not wired.

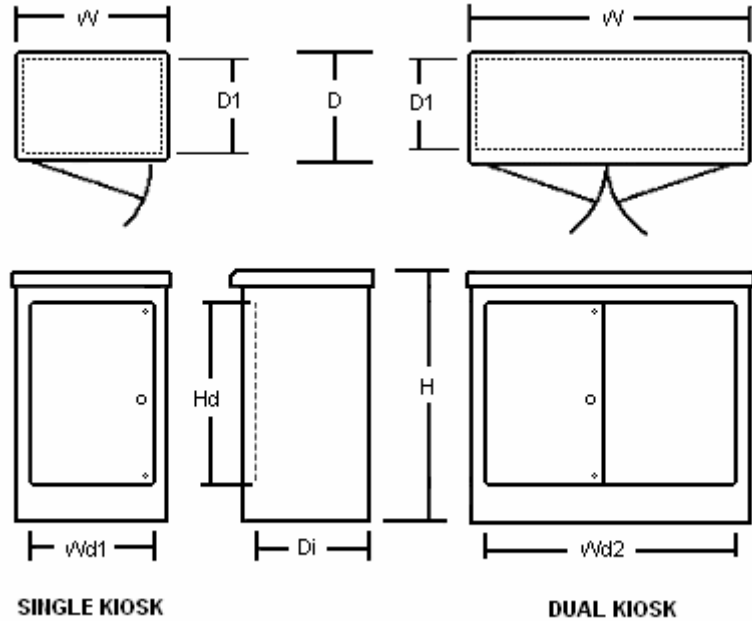

SINGLE KIOSK

DUAL KIOSK

MODEL	DIMENSIONS (mm)							
	W	D	D1	Wd1	Wd2	H	Hd	Di
SINGLE	775	400	370	640	n/a	1290	960	350*
DUAL	1420	400	355	n/a	1280	1290	960	280*

* Denotes from backboard to handle on Yale lock

The kiosk is manufactured with a 100mm internal GRP base flange for fixing to a prepared concrete base. We strongly recommend a 'stepped' concrete base. Please note we cannot guarantee a weatherproof seal if our Kiosk is fitted to a flat concrete base.

External Smooth gel-coat finish Colour: Green

Internal Matt GRP finish Colour: Green

We can normally supply the above cabinet within 15 working days, but please ask a member of our Sales Team to confirm this at the time of order. **Please Note:** In accordance with our policy of continuous development and improvement, we reserve the right to make changes in design and specification without notice.

**IF YOU WISH TO PLACE AN ORDER, OR HAVE ANY ADDITIONAL QUESTIONS,
PLEASE CONTACT OUR SALES DEPARTMENT**