



Pump House, Unit 12 Bilton Road Industrial Estate, Erith, Kent, DA8 2AN
T: 01322 357080 E-mail: sales@pts-jung.co.uk Website: www.pts-jung.co.uk

PTS GRP KIOSKS

P727 (SINGLE), P728 (DUAL), P729 (TRIPLE)



- GRP/12mm Ply/GRP composite construction to provide a maximum 'U' value of 3.0 W/m² Deg C (Thermal insulation).
- Dust and weather proof to an IP54 Protection rating.

This panel construction offers a half- hour fire resistance, compliant with BS476 Part 22 (retention of stability, integrity and insulation). Fire retardant resin is used to provide a self-extinguishing laminate to BS476 Part 7 Class 2 (surface spread of flame).

- 1 No 700mm W x 650mm H clear opening double door fitted with door furniture as detailed below.
- 2 No Internal hinges per door
- 2 Corner locks for added door security
- 10mm Ply Backboard
- 1 No Cylinder lock with 2 Keys
- 2 Brass slide bolts (dual door version)

Optional extra

- 1 No Combination PTS (P723) Flashtone Multi-Tone Sounder (12/24V IP66) fixed only not wired.

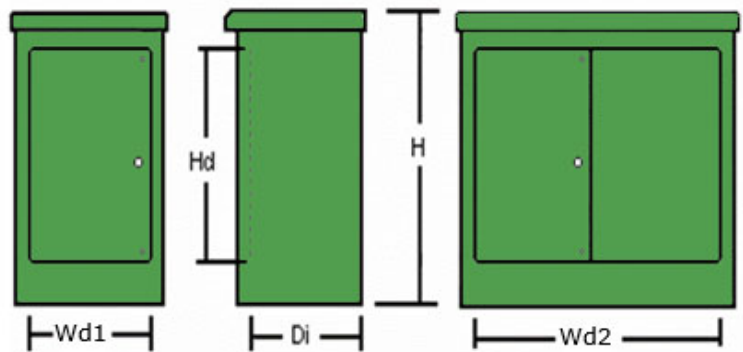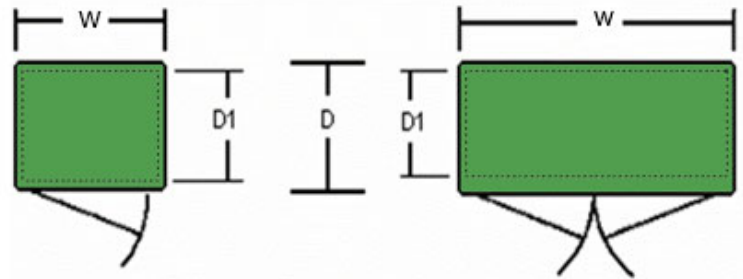

SINGLE KIOSK

DUAL KIOSK

MODEL	DIMENSIONS (MM)							
	W	D	D1	Wd1	Wd2	H	Hd	Di
SINGLE	775	400	370	640	n/a	1290	960	350*
DUAL	1420	400	355	n/a	1280	1290	960	280*

*Denotes from backboard to handle on Yale lock

The kiosk is manufactured with a 100mm internal GRP base flange for fixing to a prepared concrete base. We strongly recommend a 'stepped' concrete base. Please note we cannot guarantee a weatherproof seal if our Kiosk is fitted to a flat concrete base.

External Smooth gel-coat finish Colour: Green

Internal Matt GRP finish Colour: Green

We can normally supply the above cabinet within 15 working days, but please ask a member of our Sales Team to confirm this at the time of order. **Please Note:** In accordance with our policy of continuous development and improvement, we reserve the right to make changes in design and specification without notice.

IF YOU WISH TO PLACE AN ORDER, OR HAVE ANY ADDITIONAL QUESTIONS, PLEASE CONTACT OUR SALES DEPARTMENT